

# Leeson PU Self Leveller for Floors

COATING (PU4174-2)



## DESCRIPTION


Non-hazardous, fast curing PU self-smoothing resin for industrial and commercial flooring.

## USES


Warehouses; factories; food preparation areas; hospitals; hygienic areas

## BENEFITS


- Wear resistant
- Attractive, coloured finish
- Eliminates dust from concrete floors
- Steam clean resistant



CM6 Brick Red




CM9 Dark Green




CM7 Safety Yellow

Leeson PUSL-2

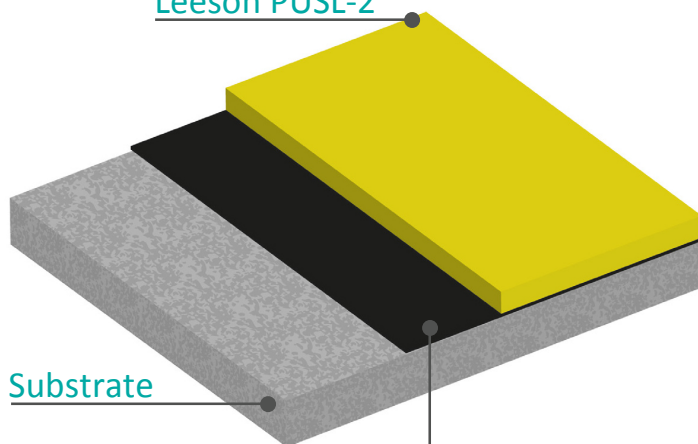


Substrate


Primer



CM5 Dark Grey



CM4 Mid Grey



CM2 Mid Blue



# Leeson

## PU Self Leveller for Floors

### COATING (PU4174-2)



#### PRODUCT SPECIFICATION

Product: Leeson PU SL Floor 2

Thickness: Typically 2mm

Manufacturer: Leeson Polyurethanes Ltd.

Telephone: + 44 (0) 1926 833367

#### SUBSTRATE REQUIREMENTS

The substrate should be dry to 75%RH as per BS8204 and free from rising damp.

Concrete: Primer must be used. Minimum 25N/mm<sup>2</sup>, free from laitance, dust and other contamination.

#### PRODUCTS INCLUDED IN THIS SYSTEM

Primer:	Conprime-2 (E4568)	0.25kg/m <sup>2</sup>
	Chelford 52 Sand	1kg/m <sup>2</sup>
Sealing Coat:	Leeson PU SL (PU4174-2)	2 x 1kg/m <sup>2</sup>
Antislip Coat:	PU4984 (optional)	0.3kg/m <sup>2</sup>

Detailed installation instructions are available on request.

#### INSTALLATION SERVICE

The installation should be carried out by an experienced contractor, details of contractors in your area can be obtained by contacting the company.

#### IMPORTANT NOTE

Leeson Polyurethanes' products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

#### UV DISCOLOURATION

\*Please note that PU SL-2 is based on MDI polyurethane technology which is subject to colour change under exposure to UV. The strength of the system is not affected.

Please contact the company for further details.

#### TECHNICAL INFORMATION

The figures below are typical properties achieved in laboratory tests at 21°C and 55% Relative Humidity.

##### Temperature Resistance

Resistant to temperatures of up to 50°C for long periods.

##### Chemical Resistance

To various acids, diesel and petrol as well as strong bases.

##### Elongation @ Break (PU4174-2)

min 150% to BS2782 Part 3

##### Tensile Strength (PU4174-2)

Min 15 N/mm<sup>2</sup> to BS2782 Part 3

##### Speed of Cure

19°C

Overnight

##### Installation Cycle Time

From completion of surface prep to cure including anti-slip sealer 5 hours.

#### AFTERCARE - CLEANING AND MAINTENANCE

The surface should be cleaned regularly.

#### ENVIRONMENTAL IMPACT

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture of the products by Leeson Polyurethanes staff.

#### FURTHER INFORMATION

To ensure you are specifying a fit for purpose surface for your project please consult our Area Sales Manager for your area or visit our website.



**Leeson Polyurethanes Ltd.**

Hermes Close, Warwick, CV34 6RP, UK.

Tel: +44 (0) 1926 833367 Fax: +44 (0) 1926 881469  
sales@lpultd.com | www.lpultd.com

{ A bond for life }