



Leeson
Polyurethanes

A brand of ICP Building Solutions Group



PU Anti-Skid for Roads

Leeson Grip 3-1VHB

COATING (PU4018/20)



DESCRIPTION

A high performance, flexible polyurethane based anti-skid system for installation onto steel substrates. The system gives a hard-wearing anti-skid surface and has been formulated with the additional flexibility required for installation onto steel.

USES

Bridges; Loading ramps/areas; Heavy Duty Road Dressing

BENEFITS


- Anti-Skid Surface
- High Build System
- Fast Curing
- Excellent Wear Performance
- Resistant to oil, diesel & petrol
- No odour

Non-Slip Aggregate

Leeson Grip 3-1VHB PU

Metal Primer (PU5701)

Metal

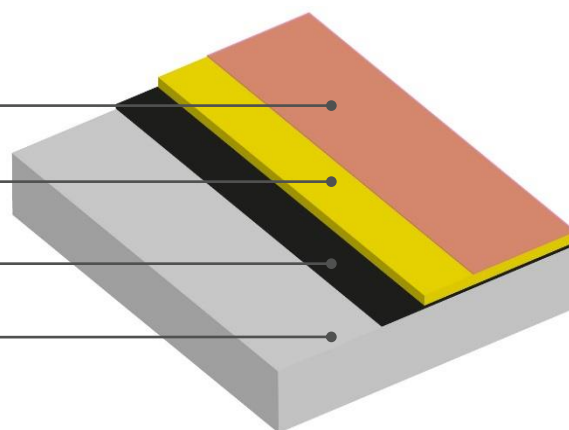

{ A bond for life }



Hermes Close, Warwick, CV34 6RP, UK
+44 (0) 1926 833367 | lpusales@icpgroup.com
www.lpultd.com | www.icpgroup.com



Leeson
Polyurethanes

A brand of ICP Building Solutions Group



PU Anti-Skid for Roads

Leeson Grip 3-1VHB

COATING (PU4018/20)

PRODUCT SPECIFICATION

Product: Leeson Grip 3-1VHB (PU4018/20)

Thickness: 3-5mm of PU Resin

Manufacturer: Leeson Polyurethanes Ltd.

Telephone: + 44 (0) 1926 833367

SUBSTRATE REQUIREMENTS

The metal substrate should be prepared to S.A. 2.5 with minimum surface texture of 60 microns. Temperature +3°C above the dew point and rising.

Metal: PU5015 primer required.

PRODUCTS INCLUDED IN THIS SYSTEM

Primer: Leeson Metal Primer (PU5701 0.1kg/m²)

Bonding Coat: Leeson Grip 3-1VHB (PU4018/20)

3kg/m² (1-3mm aggregate)

5kg/m² (3-5mm aggregate)

Aggregate: Non-slip Aggregate 1-3mm 8kg/m²

Non-slip Aggregate 3-5mm 13kg/m²

Detailed installation instructions are available on request.

INSTALLATION SERVICE

The installation should be carried out by an experienced contractor, details of contractors in your area can be obtained by contacting the company.

IMPORTANT NOTE

Leeson Polyurethanes' products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

TECHNICAL INFORMATION

The figures below are typical properties achieved in laboratory tests at 21°C and 55% Relative Humidity.

Temperature Resistance

Resistant to extreme temperatures (-20°C to +120°C) for long periods.

Chemical Resistance

To various acids, diesel and petrol as well as strong bases.

Tensile Strength (PU4018/20)

6 N/mm² to BS2782 Part 3

Elongation @ Break (PU4018/20)

15% to BS2782 Part 3

Tensile Adhesion (mild steel)

12.5N/mm²

Speed of Cure

Traffic Ready: 2 hours @ 20°C

AFTERCARE - CLEANING AND MAINTENANCE

Clean as required, remove any loose aggregate after initial traffic.

ENVIRONMENTAL IMPACT

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning.

Environmental and health considerations are controlled during manufacture of the products by Leeson Polyurethanes staff.

FURTHER INFORMATION

To ensure you are specifying a fit for purpose surface for your project please consult our Area Sales Manager for your area or visit our website.

{ A bond for life }



Hermes Close, Warwick, CV34 6RP, UK
+44 (0) 1926 833367 | lpusales@icpgroup.com
www.lpultd.com | www.icpgroup.com