

# PU Systems for Sports Sandwich System

COATING (PU4872/PU4731/PU4732)



## DESCRIPTION

A multi component encapsulated sandwich system for athletic tracks and multi-use games areas (MUGAS).

## USES

Running tracks; Jogging tracks; Athletics.


## BENEFITS

- Non-Porous system
- Fast curing
- Durable
- Quick installation
- Anti-slip
- Ancillary products available e.g. primers, accelerators and resealers

Flood Coat/  
EPDM Crumb

SBR Rubber/  
PU Binder Matrix

Substrate

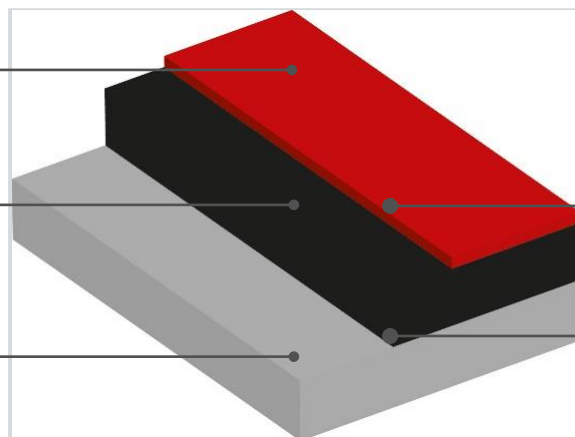

Pore Sealer

Primer

# PU Systems for Sports Sandwich System

## COATING (PU4872/PU4731/PU4732)



### PRODUCT SPECIFICATION

Product: Leeson Sandwich Running Track System  
Thickness: Typically 10-13mm  
Manufacturer: Leeson Polyurethanes Ltd.  
Telephone: + 44 (0) 1926 833367

### SUBSTRATE REQUIREMENTS

System typically installed on asphalt or concrete.

### PRODUCTS INCLUDED IN THIS SYSTEM

Primer:	PU3922 spread at	0.15kg/m <sup>2</sup> .
Base Layer:	SBR /PU4872@18%	9.7kg/m <sup>2</sup> .
Pore Sealer:	PU4731	1.4kg/m <sup>2</sup> .
Flood Coat:	PU4732	1.5kg/m <sup>2</sup> .
Topping:	EPDM 0.5-1.5mm	0.7kg/m <sup>2</sup>
	EPDM Dust	0.06kg/m <sup>2</sup>

Detailed installation instructions are available on request.

### INSTALLATION SERVICE

The installation should be carried out by an experienced contractor, details of contractors in your area can be obtained by contacting the company.

### IMPORTANT NOTE

Leeson Polyurethanes' products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

### UV DISCOLOURATION

\*Please note that rubber crumb binder products are based on MDI polyurethane technology which is subject to colour change under exposure to UV. The strength of the system is not affected.

We have in-house UV testing facilities and can test customer's rubber/binder combinations. We strongly urge our customers to use this service prior to using a new rubber.

### TECHNICAL INFORMATION

The figures below are typical properties achieved in laboratory tests at 21°C and 55% Relative Humidity.

#### Temperature Resistance

Resistant to temperatures of over 70°C for long periods.

#### Elongation @ Break (PU4731)

Minimum 80%

#### Tensile Strength (PU4731)

Minimum 6.5 N/mm<sup>2</sup>

#### Elongation @ Break (PU4732)

Minimum 240%

#### Tensile Strength (PU4732)

Minimum 3 N/mm<sup>2</sup>

#### Chemical Resistance

To various acids, diesel and petrol as well as strong bases.

### AFTERCARE - CLEANING AND MAINTENANCE

The surface should be swept regularly to keep it free of organic material such as leaves.

### ENVIRONMENTAL IMPACT

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture of the products by Leeson Polyurethanes staff.

### FURTHER INFORMATION

To ensure you are specifying a fit for purpose surface for your project please consult our Area Sales Manager for your area or visit our website.



**Leeson Polyurethanes Ltd.**

Hermes Close, Warwick, CV34 6RP, UK.

Tel: +44 (0) 1926 833367 Fax: +44 (0) 1926 881469  
sales@lpultd.com | www.lpultd.com

{ A bond for life }